



ottomotores

# DOOSAN Serie P222LE

Energía que Mueve al Mundo

## DNY600

### Definición

El rendimiento del motor se corresponde con la norma **ISO 3046, BS 5514 y DIN 6271**.

Las clasificaciones se basan en la norma **ISO 8528**. (Si necesita más información, póngase en contacto con la organización de ventas.)

### Potencia Prime

Está disponible para un número ilimitado de horas al año en una aplicación de carga variable. La potencia media consumible durante 24 horas de operación no deberá sobrepasar el 70% de la potencia nominal.

### Potencia Standby

Está disponible en el caso de un corte de suministro eléctrico o en condiciones de prueba para un máximo de 200 horas de funcionamiento por año. La potencia media consumible durante 24 horas de operación no deberá exceder de 70% de la potencia de reserva.

### Tabla de Potencias

Modelo	Voltaje	kVA Prime	kWe Prime	kVA Stand-by	kWe Stand-by
DNY600	440-220V	690	552	757	606

0.8 Factor de Potencia



Datos Técnicos	
<b>Motor:</b>	P222LE
<b>Generador:</b>	Stamford HCI534E
<b>Numero de Cilindros</b>	12 en-"V"
<b>Diametro por Carrera:</b>	128(5.04) x 142(5.59) mm(in)
<b>Relación de Compresión:</b>	15.0:1
<b>Aspiración:</b>	Turbo y postenfriado (aire - aire)
<b>Desplazamiento:</b>	21.927(1,338.0) lts(in <sup>3</sup> )
<b>Consumo a plena carga:</b>	173.5 lts - 100% carga
<b>Frecuencia:</b>	60 Hz
<b>Velocidad:</b>	1800 rpm
<b>Presion Efectiva:</b>	Max. 0.9 kg/cm <sup>2</sup> (12.8 psi)
<b>Flujo de Agua:</b>	410 lts/min.
<b>Calor rechazado en refrigerante:</b>	60.2 kcal/sec
<b>Flujo de Aire:</b>	46.7 m <sup>3</sup> /min
<b>Flujo de Escape:</b>	137.0 m <sup>3</sup> /min
<b>Temperatura de Escape:</b>	606°C
Restricciones Max. Permisibles	
<b>Sistema de Admision:</b>	220mmH <sup>2</sup> O initial - 635mmH <sup>2</sup> O final
<b>Sistema de Escape:</b>	600mmH <sup>2</sup> O max
<b>Sistema de Aislamiento</b>	Clase H
<b>Sistema de control:</b>	Separado y exitado por PMG
<b>AVR</b>	MX341



Nota: Imagen de carácter ilustrativa ya que los equipos en foto pudieran incluir accesorios opcionales

Como leer nuestro codigo Ejem: **DNY100**

D = Motor Doosan  
N =Generador Newage Stamford  
Y = Frecuencia 60Hz-1800 RPM  
100 =Potencia del Equipo.




LAPEM

Ottomotores, S.A de C.V.

Calz. San Lorenzo No.1150  
Col. Cerro de la estrella, C.P. 09860  
Delg. Iztapalapa México, D.F.  
Tels:52-55-5624-5600

Fax: 52-55-5426-5521 / 52-55-5426-5581  
email sales : [ventas@ottomotores.com.mx](mailto:ventas@ottomotores.com.mx)  
sitio web: [www.ottomotores.com.mx](http://www.ottomotores.com.mx)

## Dimensiones

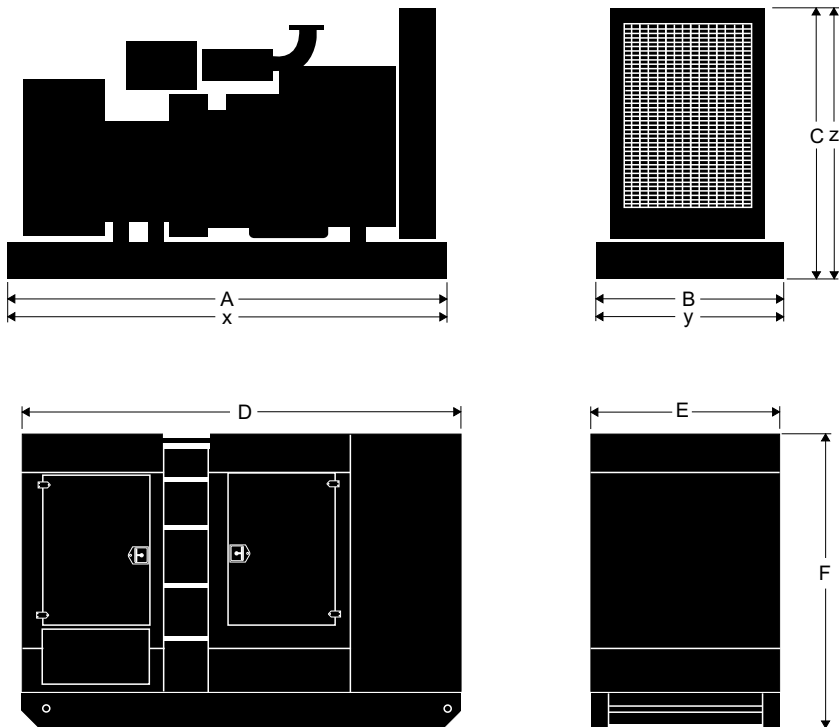

C.p. pack	Equipo con Base Estructural			Equipo con Base Tanque			Equipo con Caseta Acústica*		
	A	B	C	x	y	z	D	E	F
	380,00	140,00	192,00	381,00	175,00	195,00	500,00	175,00	250,00
	Peso: 2955,00 kgs			Peso: 3990,00 kgs			Peso: 4968,00 kgs		

[\*] optional

## Información Técnica

Nota: las condiciones de referencia estándar son de 25 °C (77 ° F) temperatura de entrada de aire. Todos los datos de desempeño de motores son basados en la potencia mencionada arriba.

Datos de consumo de combustible a plena carga con combustible diesel tienen una gravedad específica de 0,85.

Comercializado por:

## Módulos de Control



Ottomotores tiene una posición única en la fabricación de grupos electrógenos utilizando en ellos módulos de control que cumplen con todos los niveles de requerimiento del mercado nacional y de exportación.



Las diferentes soluciones de controles que se tienen para nuestra gama de plantas generadoras, permite una operación simple en modo manual y automático, así mismo permiten desarrollar proyectos de sincronía entre plantas generadoras o con la red de energía eléctrica.



La familia de módulos de control en transición abierta (DALE 3200) permite tener control en forma automática de la unidad de transferencia, así como el monitoreo del grupo generador.



Nuestro módulos de control cuentan con puerto de comunicación RS485 para la comunicación remota con el grupo generador.



La familia de módulos de control para la sincronía (6100, 6050 y 6300), incorporan un amplio sistema de monitoreos además de conexión a Internet (LAN) o mensaje SMS vía celular, o usando los puertos de comunicación RS485 a través de ModBus



**ottomotores**

Energía que Mueve al Mundo


Calz. San Lorenzo No.1150  
Col. Cerro de la Estrella, C.P.09860  
Delegación Iztapalapa México D.F.  
Tels: 52-55-5624-5600  
Fax: 52-55-5426-55-21 / 52-55-54265581

E-mail [ventas1@ottomotores.com.mx](mailto:ventas1@ottomotores.com.mx)  
[ventas2@ottomotores.com.mx](mailto:ventas2@ottomotores.com.mx)

Web site. [www.ottomotores.com.mx](http://www.ottomotores.com.mx)

## ◎ POWER RATING

Engine Speed rev/min	Type of Operation	Engine Power	
		kWm	Ps
1800	Continuous Power	537	730
	Prime Power	591	803
	Standby Power	649	883
1500	Continuous Power	473	643
	Prime Power	532	723
	Standby Power	574	781

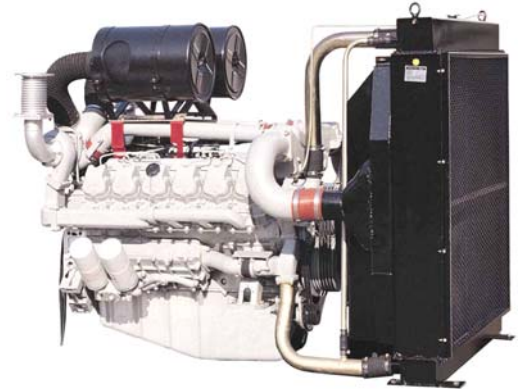

Note : -. The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271.

-. Ratings are based on ISO 8528.

→ **Prime power** available at variable load. The permissible average power out put (during 24h period) shall not exceed 70% of the prime power rating.

→ **Standby power** available in the event of a main power network failure. No overload is permitted.

## ◎ MECHANICAL SYSTEM

○ Engine Model	P222LE
○ Engine Type	V-type 4 cycle, water cooled Turbo charged & intercooled (air to air)
○ Combustion type	Direct injection
○ Cylinder Type	Replaceable wet liner
○ Number of cylinders	12
○ Bore x stroke	128(5.04) x 142(5.59) mm(in.)
○ Displacement	21.927 (1,338.0) lit.(in <sup>3</sup> )
○ Compression ratio	15 : 1
○ Firing order	1-12-5-8-3-10-6-7-2-11-4-9
○ Injection timing	16° BTDC
○ Compression pressure	Above 28 kg/cm <sup>2</sup> (398 psi) at 200rpm
○ Dry weight	Approx. 1,575 kg (3,472 lb)
○ Dimension (LxWxH)	1,717 x 1,389 x 1,288 mm (67.6 x 54.7 x 50.7 in.)
○ Rotation	Counter clockwise viewed from Flywheel
○ Fly wheel housing	SAE NO.1
○ Fly wheel	Clutch NO.14

## ◎ MECHANISM

○ Type	Over head valve
○ Number of valve	Intake 1, exhaust 1 per cylinder
○ Valve lashes at cold	Intake 0.25mm (0.0098 in.) Exhaust 0.35mm (0.0138 in.)

## ◎ VALVE TIMING

	Opening	Close
○ Intake valve	24 deg. BTDC	36 deg. ABDC
○ Exhaust valve	63 deg. BBDC	27 deg. ATDC

## ◎ FUEL CONSUMPTION

○ Prime Power (lit/hr)	<b>1,500 rpm</b>	<b>1,800 rpm</b>
25%	35.7	41.9
50%	65.8	75.9
75%	97.6	112
100%	134	153.9
○ Standby Power (lit/h)	<b>1,500 rpm</b>	<b>1,800 rpm</b>
25%	39.8	45.5
50%	74.5	83.7
75%	112.3	125.8
100%	154.3	173.5

## ◎ FUEL SYSTEM

○ Injection pump	Bosch in-line "P" type
○ Governor	Electric type
○ Feed pump	Mechanical type
○ Injection nozzle	Multi hole type
○ Opening pressure	285 kg/cm <sup>2</sup> (4,054 psi)
○ Fuel filter	Full flow, cartridge type
○ Used fuel	Diesel fuel oil

## ◎ LUBRICATION SYSTEM

○ Lub. Method	Fully forced pressure feed type
○ Oil pump	Gear type driven by crankshaft
○ Oil filter	Full flow, cartridge type
○ Oil pan capacity	High level 40 liters ( 10.6 gal.) Low level 33 liters ( 8.7 gal.)
○ Angularity limit	Front down 20 deg. Front up 20 deg. Side to side 15 deg.
○ Lub. Oil	Refer to Operation Manual

## ◎ COOLING SYSTEM

- Cooling method      Fresh water forced circulation
- Water capacity      23 liters ( 6.07 gal.)  
(engine only)
- Pressure system     Max. 0.9 kg/cm<sup>2</sup> ( 12.8 psi)
- Water pump          Centrifugal type driven by belt
- Water pump Capacity 410 liters ( 108.2 gal.)/min  
at 1,800 rpm (engine)
- Thermostat         Wax – pellet type  
Opening temp. 71°C  
Full open temp. 85°C
- Cooling fan         Blower type, plastic  
915 mm diameter, 7 blade

## ◎ ELECTRICAL SYSTEM




- Charging generator   24V x 45A alternator
- Voltage regulator    Built-in type IC regulator
- Starting motor        24V x 7.0kW
- Battery Voltage       24V
- Battery Capacity     200 AH (recommended)
- Starting aid (Option) Block heater

## ◎ ENGINEERING DATA

- |                                 |  |
|---------------------------------|--|
| ○ Water flow                    | 342 liters/min @1,500 rpm                                      |
| ○ Heat rejection to coolant     | 59.0 kcal/sec @1,500 rpm                                       |
| ○ Heat rejection to CAC         | 21.1 kcal/sec @1,500 rpm                                       |
| ○ Air flow                      | 38.0 m <sup>3</sup> /min @1,500 rpm                            |
| ○ Exhaust gas flow              | 117.5 m <sup>3</sup> /min @1,500 rpm                           |
| ○ Exhaust gas temp.             | 580 °C @1,500 rpm  |
| <hr/>                           |  |
| ○ Water flow                    | 410 liters/min @1,800 rpm                                      |
| ○ Heat rejection to coolant     | 60.2 kcal/sec @1,800 rpm                                       |
| ○ Heat rejection to CAC         | 27.9 kcal/sec @1,800 rpm                                       |
| ○ Air flow                      | 46.7 m <sup>3</sup> /min @1,800 rpm                            |
| ○ Exhaust gas flow              | 137.0 m <sup>3</sup> /min @1,800 rpm                           |
| ○ Exhaust gas temp.             | 606 °C @1,800 rpm  |
| <hr/>                           |  |
| ○ Max. permissible restrictions |  |
| -.Intake system                 | 220 mmH <sub>2</sub> O initial<br>635 mmH <sub>2</sub> O final |
| -.Exhaust system                | 600 mmH <sub>2</sub> O max.                                    |

## ◆ CONVERSION TABLE

- |                                    |                                    |
|------------------------------------|------------------------------------|
| in. = mm x 0.0394                  | lb/ft = N.m x 0.737                |
| PS = kW x 1.3596                   | U.S. gal = lit. x 0.264            |
| psi = kg/cm <sup>2</sup> x 14.2233 | kW = 0.2388 kcal/s                 |
| in <sup>3</sup> = lit. x 61.02     | lb/PS.h = g/kW.h x 0.00162         |
| hp = PS x 0.98635                  | cfm = m <sup>3</sup> /min x 35.336 |
| lb = kg x 2.20462                  |                                    |

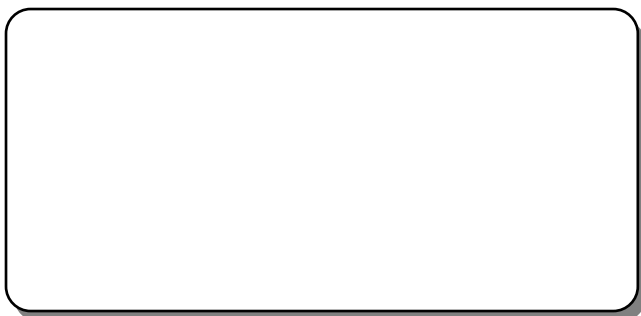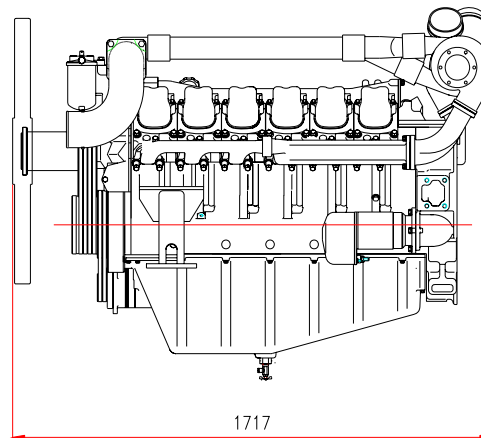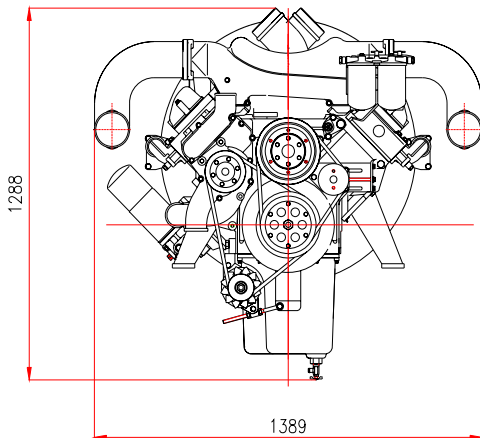


**Head office**  
7-11, Hwasu-Dong, Dong-Gu, Incheon, Korea  
**TEL : 82-32-760-1437, 1964 FAX : 82-32-760-1964**

**Seoul Office**  
Doosan Infracore Co. Ltd.,  
22nd Floor, Doosan Tower, 18-12, Euljiro 6-ga, Jung-gu,  
Seoul, Korea.  
**TEL : 82-2-3398-8521~8535 FAX : 82-2-3398-8509**  
**Web site : www.doosaninfracore.com**

※ Specifications are subject to change without prior notice

## HCI 534E/544E - Technical Data Sheet

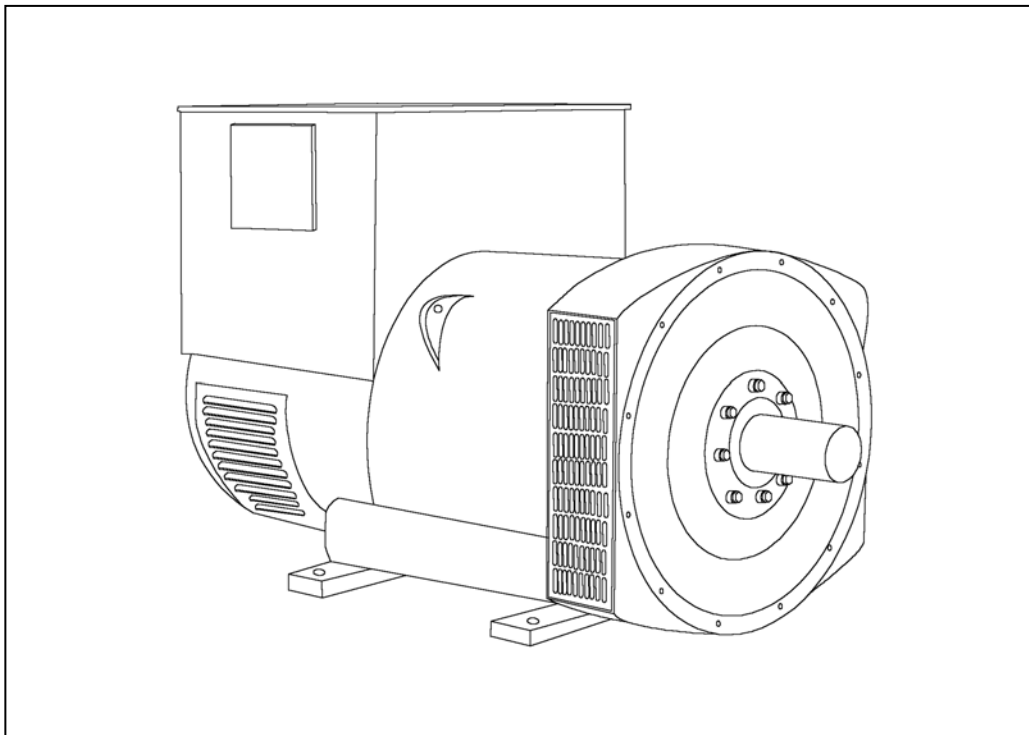

# HCI534E/544E

## SPECIFICATIONS & OPTIONS



### STANDARDS

Newage Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

### VOLTAGE REGULATORS

#### SX440 AVR - STANDARD

With this self-excited system the main stator provides power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The SX440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

If 3-phase sensing is required with the self-excited system, the SX421 AVR must be used.

#### SX421 AVR

This AVR also operates in a self-excited system. It combines all the features of the SX440 with, additionally, three-phase rms sensing for improved regulation and performance. Over voltage protection is provided via a separate circuit breaker. An engine relief load acceptance feature is built in as standard.

#### MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

#### MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

### WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

### TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

### SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

### INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

### QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

*NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.*

*Front cover drawing typical of product range.*

**HCI534E/544E**

**WINDING 311**

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.		
A.V.R.	MX321	MX341	
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)		

CONTROL SYSTEM	SELF EXCITED		
A.V.R.	SX440	SX421	
VOLTAGE REGULATION	± 1.0 %	± 0.5 %	With 4% ENGINE GOVERNING
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT		

INSULATION SYSTEM	CLASS H		
PROTECTION	IP23		
RATED POWER FACTOR	0.8		
STATOR WINDING	DOUBLE LAYER LAP		
WINDING PITCH	TWO THIRDS		
WINDING LEADS	12		
STATOR WDG. RESISTANCE	0.0043 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED		
ROTOR WDG. RESISTANCE	1.96 Ohms at 22°C		
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others		
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%		
MAXIMUM OVERSPEED	2250 Rev/Min		
BEARING DRIVE END	BALL. 6220 (ISO)		
BEARING NON-DRIVE END	BALL. 6314 (ISO)		

	1 BEARING	2 BEARING
WEIGHT COMP. GENERATOR	1543 kg	1535 kg
WEIGHT WOUND STATOR	722 kg	722 kg
WEIGHT WOUND ROTOR	617 kg	588 kg
WR <sup>2</sup> INERTIA	8.9828 kgm <sup>2</sup>	8.7049 kgm <sup>2</sup>
SHIPPING WEIGHTS in a crate	1635 kg	1625 kg
PACKING CRATE SIZE	166 x 87 x 124(cm)	166 x 87 x 124(cm)
	50 Hz	60 Hz
TELEPHONE INTERFERENCE	THF<2%	TIF<50
COOLING AIR	1.035 m <sup>3</sup> /sec 2202 cfm	1.312 m <sup>3</sup> /sec 2780 cfm

	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE SERIES STAR								
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
KVA BASE RATING FOR REACTANCE VALUES	600	600	600	600	681	713	731	750
X <sub>d</sub> DIR. AXIS SYNCHRONOUS	3.14	2.83	2.63	2.34	3.53	3.30	3.10	2.92
X' <sub>d</sub> DIR. AXIS TRANSIENT	0.17	0.15	0.14	0.12	0.17	0.16	0.15	0.14
X'' <sub>d</sub> DIR. AXIS SUBTRANSIENT	0.12	0.11	0.10	0.09	0.12	0.11	0.11	0.10
X <sub>q</sub> QUAD. AXIS REACTANCE	2.45	2.21	2.05	1.82	2.82	2.64	2.48	2.33
X'' <sub>q</sub> QUAD. AXIS SUBTRANSIENT	0.26	0.24	0.22	0.20	0.34	0.32	0.30	0.28
X <sub>L</sub> LEAKAGE REACTANCE	0.06	0.05	0.05	0.04	0.06	0.06	0.05	0.05
X <sub>2</sub> NEGATIVE SEQUENCE	0.18	0.16	0.15	0.13	0.23	0.22	0.20	0.19
X <sub>0</sub> ZERO SEQUENCE	0.08	0.08	0.07	0.06	0.10	0.09	0.09	0.08





REACTANCES ARE SATURATED	VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED
T' <sub>d</sub> TRANSIENT TIME CONST.	0.08s
T'' <sub>d</sub> SUB-TRANSTIME CONST.	0.012s
T' <sub>do</sub> O.C. FIELD TIME CONST.	2.5s
T <sub>a</sub> ARMATURE TIME CONST.	0.019s
SHORT CIRCUIT RATIO	1/X <sub>d</sub>

**50  
Hz**





**HCI534E/544E**  
Winding 311



**THREE PHASE EFFICIENCY CURVES**

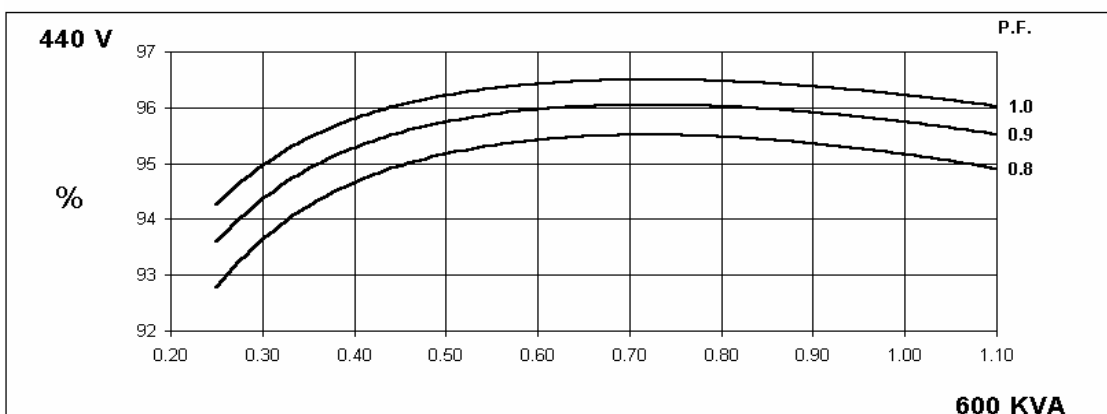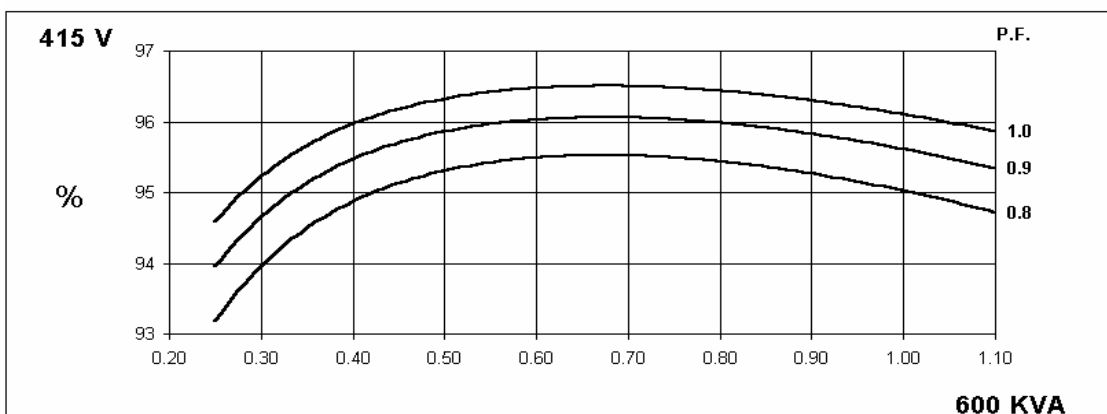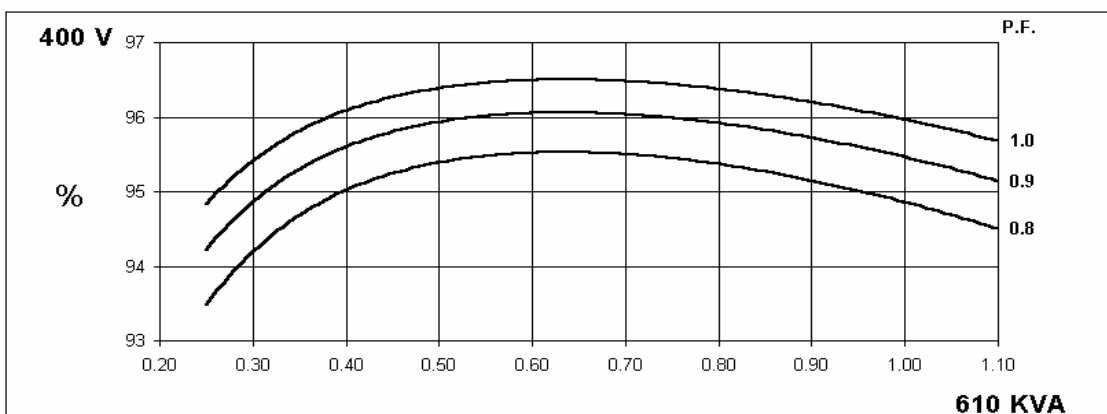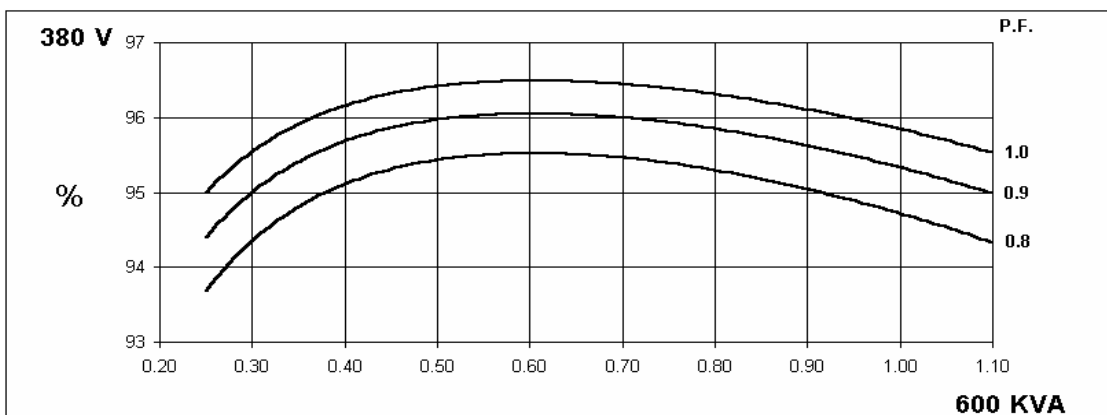

**THREE PHASE EFFICIENCY CURVES**

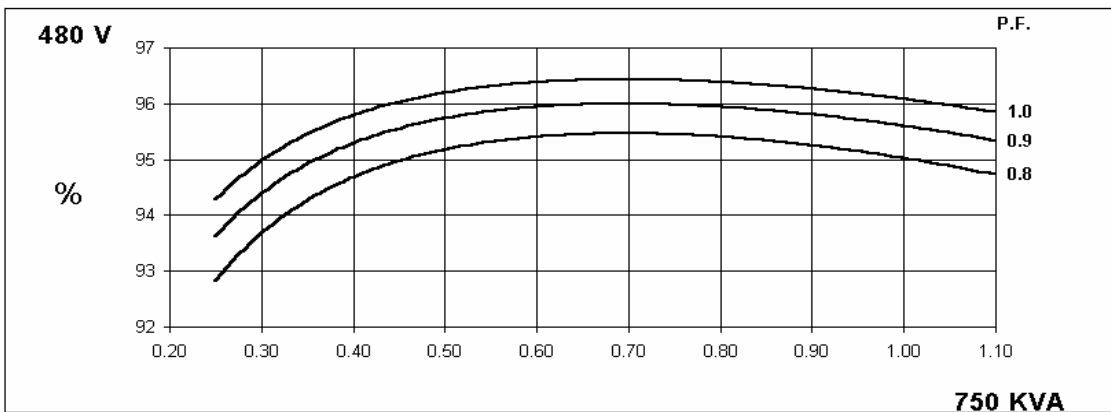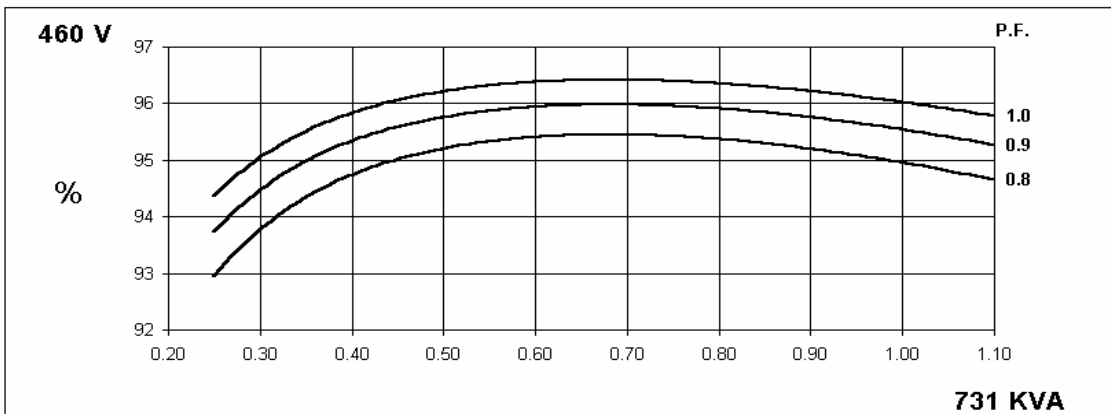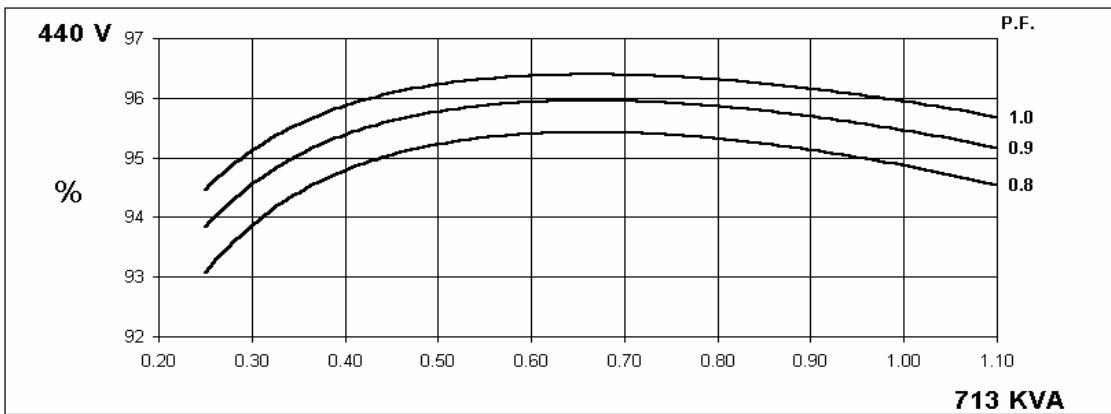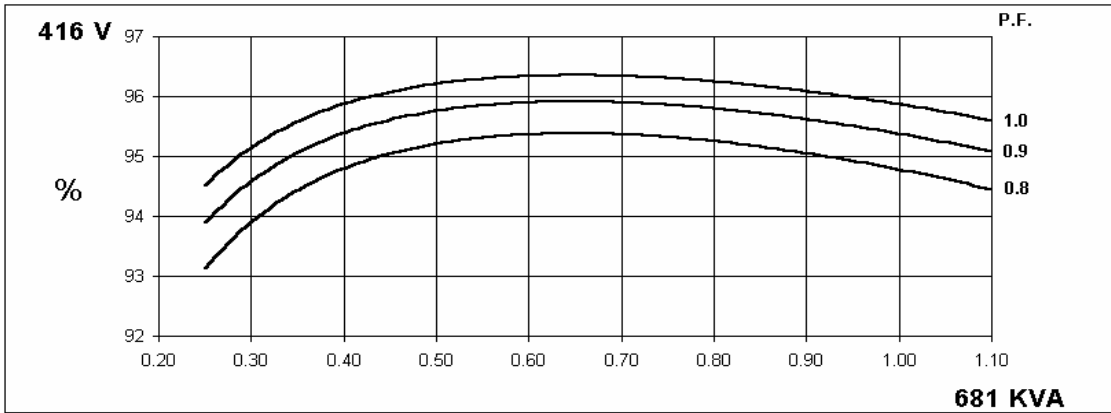

# HCI534E/544E

Winding 311





## Locked Rotor Motor Starting Curve

**50  
Hz**

**MX**



**SX**

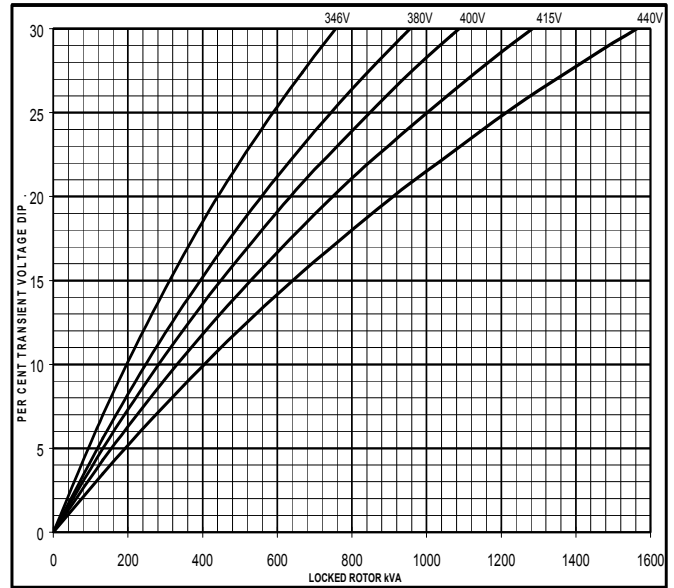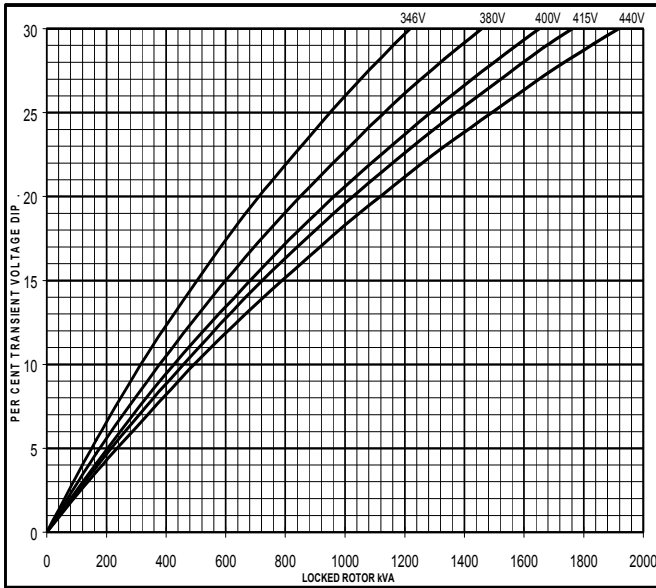

**60  
Hz**


**MX**

**SX**

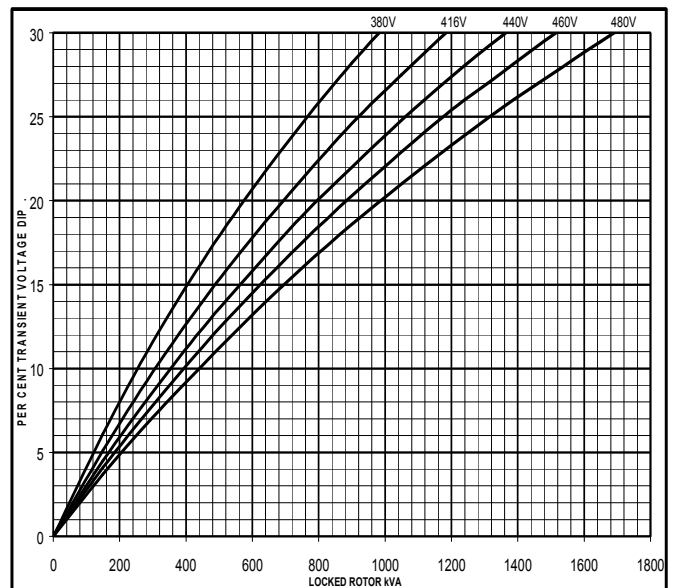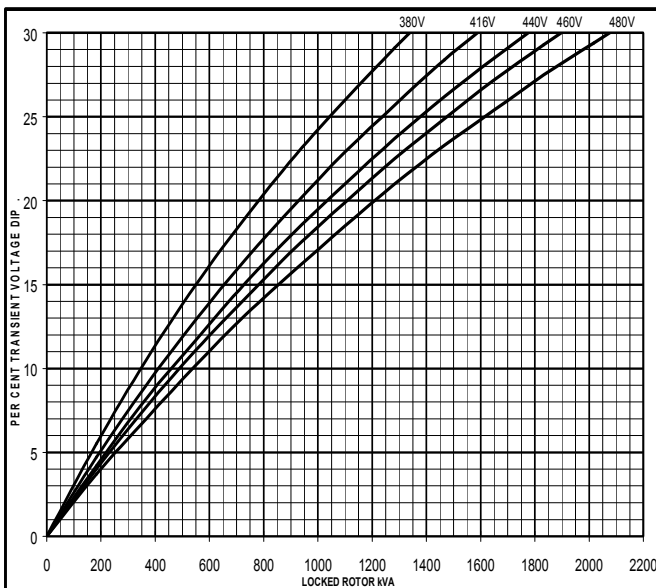


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.**

**50  
Hz**

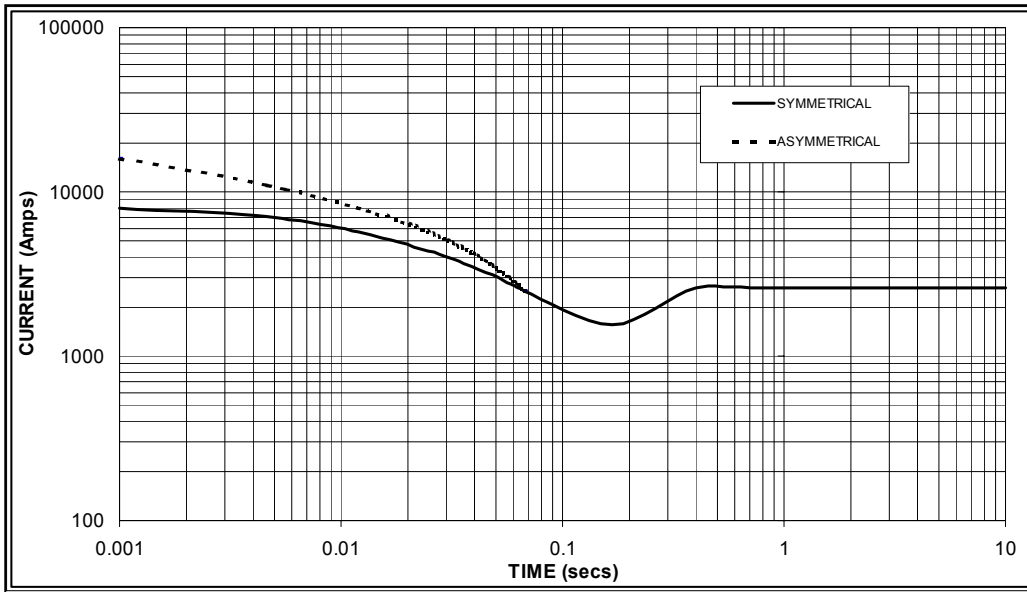

Sustained Short Circuit = 2,600 Amps

**60  
Hz**

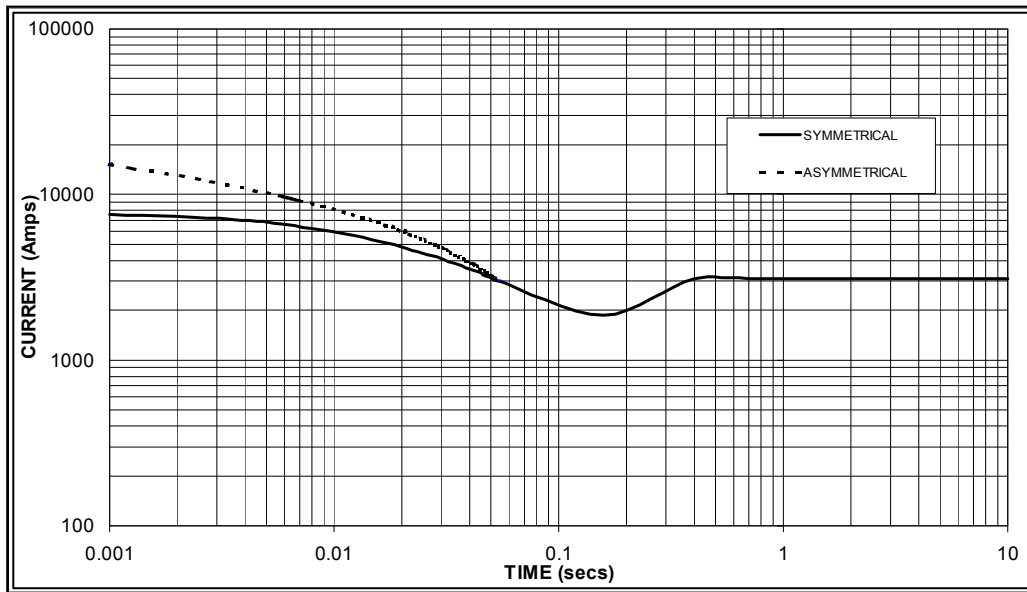

Sustained Short Circuit = 3,100 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.06	440v	X 1.06
415v	X 1.09	460v	X 1.12
440v	X 1.12	480v	X 1.20

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

# HCI534E/544E

Winding 311 0.8 Power Factor




## RATINGS

Class - Temp Rise	Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C				
<b>50 Hz</b>	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
kVA	550	560	550	550	600	610	600	600	636	640	636	636	660	665	660	660	
kW	440	448	440	440	480	488	480	480	509	512	509	509	528	532	528	528	
Efficiency (%)	95.0	95.1	95.2	95.3	94.7	94.9	95.0	95.2	94.5	94.7	94.8	95.0	94.3	94.5	94.7	94.9	
kW Input	463	471	462	462	507	514	505	504	538	541	537	536	560	563	558	556	

<b>60 Hz</b>	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
kVA	625	650	663	675	681	713	731	750	719	750	780	800	738	769	798	819	
kW	500	520	530	540	545	570	585	600	575	600	624	640	590	615	638	655	
Efficiency (%)	95.0	95.1	95.2	95.3	94.8	94.9	95.0	95.0	94.6	94.7	94.8	94.8	94.5	94.6	94.7	94.8	
kW Input	526	547	557	567	575	601	616	632	608	634	658	675	625	650	674	691	

## DIMENSIONS

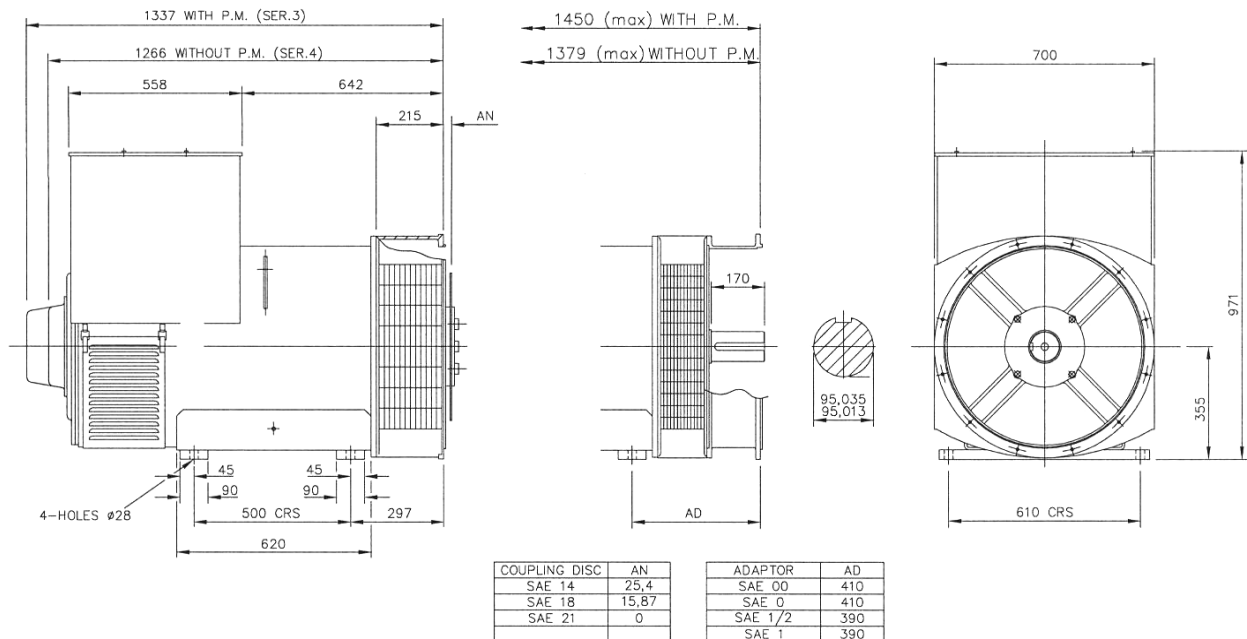

PO Box 17 • Barnack Road • Stamford • Lincolnshire • PE9 2NB

Tel: 00 44 (0)1780 484000 • Fax: 00 44 (0)1780 484100

Website: [www.newage-avkseg.com](http://www.newage-avkseg.com)